



**Coude KLIKSO à deux emboîtures**

Gamme KLIKSO - DN 63 à 225  
1/4, 1/8 et 1/16



**KLIKSO**

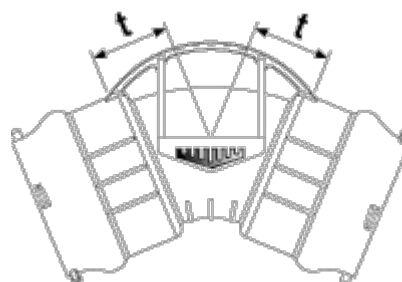

**Coude KLIKSO en fonte ductile pour tubes PVC-U/PE pression**

**Produits complémentaires, Variantes, Accessoires ...**

■ [Contrebride de verrouillage KLIKSO](#)

DN (mm)	Angle degré	t mm	MASSE kg	Références
63	1/4	65	3.30	<b>KZL63CA</b>
63	1/8	40	3.07	<b>KZL63CB</b>
63	1/16	20	2.57	<b>KZL63CD</b>
75	1/4	70	4.12	<b>KZL75CA</b>
75	1/8	45	3.84	<b>KZL75CB</b>
75	1/16	25	3.25	<b>KZL75CD</b>
90	1/4	75	5.22	<b>KZL90CA</b>
90	1/8	50	4.88	<b>KZL90CB</b>
90	1/16	30	4.17	<b>KZL90CD</b>
110	1/4	85	6.70	<b>KZM11CA</b>
110	1/8	60	6.40	<b>KZM11CB</b>

110	1/16	30	5.25	<b>KZM11CD</b>
125	1/4	110	8.31	<b>KZM12CA</b>
125	1/8	65	7.40	<b>KZM12CB</b>
125	1/16	30	6.06	<b>KZM12CD</b>
140	1/4	110	9.50	<b>KZM14CA</b>
140	1/8	70	8.65	<b>KZM14CB</b>
140	1/16	30	6.97	<b>KZM14CD</b>
160	1/4	130	11.69	<b>KZM16CA</b>
160	1/8	70	10.10	<b>KZM16CB</b>
160	1/16	35	8.44	<b>KZM16CD</b>
200	1/4	160	16.42	<b>KZM20CA</b>
200	1/8	70	13.26	<b>KZM20CB</b>
200	1/16	40	11.42	<b>KZM20CD</b>
225	1/4	170	19.40	<b>KZM22CA</b>
225	1/8	80	16.01	<b>KZM22CB</b>
225	1/16	45	13.67	<b>KZM22CD</b>

**Masse :** raccord + joints

**Références :** raccord + joints pré-montés dans les emboîtures